



POT/GB2003/00539/
10/537907

INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 22 JAN 2004	
WIPO	PCT


JUN 2005

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely affects the company to certain additional company law rules.

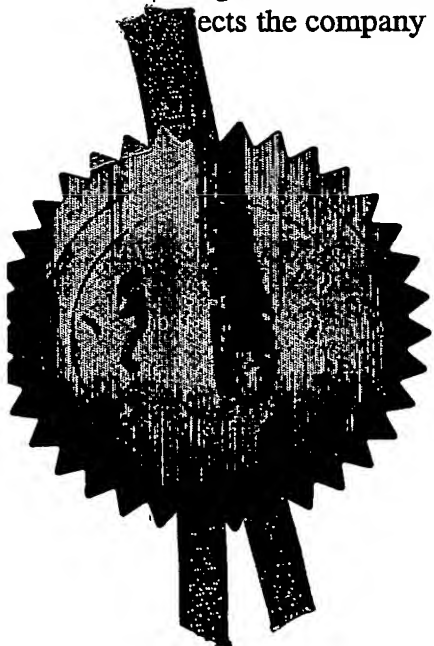

Signed *Stephen Hordley*
Dated 6 January 2004

BEST AVAILABLE COPY


**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)



11DEC02 E/70062-10 D00350
LP01/7700-0-00-0228842-1

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

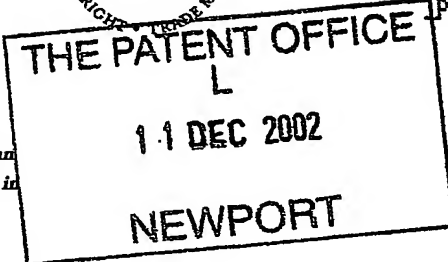

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

MG/LD/P/21946.GB

2. Patent application number

(The Patent Office will fill in this part)

0228842.1

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

KAY-METZELER LIMITED,
WELLINGTON ROAD,
BOLLINGTON,
MACCLESFIELD,
CHESHIRE, SK10 5JJ

Patents ADP number (*if you know it*)

545319001

If the applicant is a corporate body, give the country/state of its incorporation

UNITED KINGDOM

4. Title of the invention

CUSHION FOR AN AIRCRAFT SEAT

5. Name of your agent (*if you have one*)

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

WILSON GUNN M'CAW
41-51 ROYAL EXCHANGE
CROSS STREET
MANCHESTER
M2 7BD

Patents ADP number (*if you know it*)

7153927001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number
(*if you know it*)

Date of filing
(*day / month / year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(*day / month / year*)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 13

Claim(s)

Abstract

Drawing(s)

2

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date 10/12/2002

Andrew Wells - Wilson Gunn M'Cauley

12. Name and daytime telephone number of person to contact in the United Kingdom

MARK GOODWIN

0161 827 9400

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

CUSHION FOR AN AIRCRAFT SEAT

This invention relates to a cushion suitable for use in an aircraft seat.

There is a constant desire within the aviation industry to increase the efficiency of air travel. One approach to achieve this objective is to minimise the weight of aircraft components with the ultimate aim of reducing the fuel consumption of aircraft. Accordingly, a great deal of effort has focussed on reducing the weight of a whole range of aircraft components, including aircraft seat cushions.

Conventional aircraft seat cushions consist of a moulded foam structure provided with a fabric cover. The moulded foam structure is typically formed from a polyurethane-based foam. To enable the cushion to meet stringent flammability requirements that are prescribed by the aviation industry, such as the Federal Aviation Authority and equivalent national organisations, a flame retardant is incorporated into the foam formulation and, in some cases, an additional flame retardant interliner is also provided around the foam structure.

The weight of an aircraft seat cushion is principally governed by the density of the foam used to form the foam structure. The polyurethane-based foams used in the preparation of current aircraft seat cushions typically have densities within the range of 40 to 65 kg/m³. Accordingly, attempts to reduce the weight of aircraft seat cushions have focussed on the use of lower density foam materials. However, lower density foam materials tend to have poor

physical and mechanical properties, which results in the comfort and support provided by the cushion being compromised.

Therefore, it is an object of the present invention to provide an aircraft seat cushion which (i) is relatively lightweight (when compared with
5 conventional aircraft seat cushions); (ii) meets the prescribed regulatory requirements with respect to flammability; and (iii) provides adequate support and comfort for a passenger sitting in the aircraft seat.

According to a first aspect of the present invention there is provided a cushion suitable for use in an aircraft seat, said cushion comprising a foam
10 structure having a first region of a low-density flame retardant foam, a second region of a flame retardant polyurethane foam and a sealing barrier disposed at the interface between said first and second regions.

The weight of the cushions of the present invention is significantly reduced when compared with the weight of a conventional aircraft seat cushion.
15 Furthermore, the polyurethane foam constituent of the cushion provides adequate support to the lightweight foam structure to enable a person sitting on the aircraft seat to be supported with an acceptable level of comfort.

The foam materials can also be selected to provide a cushion which meets the regulatory requirements of the aviation industry. Specifically, both
20 the low-density flame retardant foam and the polyurethane flame retardant foam must satisfy the 'Vertical strip burner test' (Federal Aviation Regulation (FAR))

25.853a, Part 1, Appendix F) prescribed by the Federal Aviation Authority, as well as the 'Airbus industries' smoke and toxicity requirements (Airbus Directive (ABD) 0031). Furthermore, the cushion of the present invention must also satisfy the prescribed requirements of the 'Kerosene burner test' (Federal
5 Aviation Regulation (FAR) 25.853c, Part 2, appendix F). In brief, the FAR 'Vertical strip test' measures burn length and after-flame time, the FAR 'Kerosene burner test' measures the weight loss and burn across, and ABD0031 measures smoke obscuration and toxicity indices of the foam. A person skilled in the art will be familiar with the aforementioned requirements prescribed in
10 the ABD and FAR.

It shall also be understood that by "foam structure" we mean the foam constituent of the cushion. In most cases the foam structure will be a moulded foam structure having a base or back surface and edges that are shaped and contoured to fit into the aircraft seat structure. In addition, the foam structure
15 provides a support surface which, in use, forms the surface of the foam structure, which supports the body of the person sitting in the seat. The support surface of the foam structure is preferably formed by the flame retardant polyurethane foam (i.e. the second region preferably forms the support surface). In addition, it is also preferred that the all of the edges of the foam structure are
20 formed by the flame retardant polyurethane foam (i.e. the second region forms the support surface and the edges of the foam structure).

The low-density foam material may form the base and/or the core of the foam structure of the cushion. It is especially preferred that the low-density foam forms an inner core within the foam structure which is encapsulated by an outer layer of the flame retardant polyurethane foam (i.e. the second region
5 encapsulates the first region). This arrangement is particularly advantageous because the flame retardant polyurethane foam provides the necessary support to the inner core of the low-density foam, thereby providing sufficient comfort and support to a person sitting in the aircraft seat.

The foam structure of the cushion will normally be provided with an
10 outer fabric cover prior to use.

The sealing barrier is necessary to separate the flame retardant polyurethane foam from the low-density foam during manufacture. The flame retardant polyurethane foam is usually applied to the low-density foam in the form of a liquid and, in the absence of the sealant barrier, the liquid
15 polyurethane foam tends to seep into the pores of the low-density foam. This results in the formation of a high-density interface between the polyurethane foam and the low-density foam, which in turn causes an increase in the weight of the foam structure ultimately formed. Any suitable barrier material could be used to form the sealing barrier, such as a polyethylene or a polyvinylchloride
20 film (e.g. Clingfilm™). Preferably, however, the sealing barrier is a layer of a spray-on sealant, such as, for example, a spray-on polyurethane or PVC sealant,

which is applied to the surface of the low-density foam prior to the application of the flame retardant polyurethane foam.

The reduction in the weight is achieved by replacing a proportion of the polyurethane foam that is present in conventional aircraft seat cushions with a low-density flame retardant foam. Preferably, the ratio of the volume of the low-density foam to the volume of the polyurethane foam in the foam structure is within the range of 20:80 to 80:20 (volume to volume), with a ratio of 50:50 (volume to volume) being most preferred.

The expression "low-density flame retardant foam" is used herein to denote a flame retardant foam material having a density of within the range of 5 to 15 kg/m³. Preferably, the low-density foam is Melamine foam that has a density within the range of 8 to 12 kg/m³. An especially preferred form of Melamine foam is that produced by BASF and sold under the trade name BASOTECT™.

The expression "flame retardant polyurethane foam" is used herein to denote any polyurethane (PU) foam which is sufficiently flame retardant to satisfy the regulatory requirements prescribed for use in the aviation industry. Preferably, the PU foam has a density within the range of 30 to 70 kg/m³, with densities in the range of 40 to 65 kg/m³ being most preferred.

In a first preferred embodiment of the present invention the flame retardant polyurethane foam is a graphite/PU foam composition. The

graphite/PU foams can be produced either as a moulded foam structure or as a block foam for conversion. In the case of the block foam conversion process, a slabstock foam produced in large blocks is cut into sheets and shapes which are then stuck together to form the relevant parts of the foam structure of the aircraft seat cushion. The PU foam base is a high resilience foam system, i.e. it is produced by the reaction of high molecular weight (typically 5,000 to 6,000 Mwt.) polyether polyols with toluylene diisocyanate (TDI) and/or diphenylmethane diisocyanate (MDI) in the presence of water, catalysts and stabilisers. The required flame retardancy is imparted by the inclusion of expandable flakes of graphite in the PU foam base. The use of expandable graphite flakes as a flame retardant in PU foams is described in several patents, including GB 2168706 (Dunlop Co. Ltd), US 4,698,369 (Dunlop) and US 5,169,876 (Metzeler Schaum GmbH), the entire contents of which are incorporated herein by reference. In addition to the graphite flakes, the graphite/PU foam may also incorporate additional flame retardant additives, such as, for example, the chlorinated phosphate esters.

It is especially preferred that the graphite/PU foam is a foam that is sold under the trade name Metzoprotect™ by Kay-Metzeler Limited, U.K. Metzoprotect™ foams meet the current Federal Aviation Authority requirements with respect to flammability, namely the 'Vertical strip burner test' (FAR 25.853a, Part 1, Appendix F), as well as the 'Airbus industries' smoke and

toxicity requirements (ABD 0031). In addition, Metzoprotect™ foams can also be used to form aircraft seat cushions which satisfy the prescribed requirements of the 'Kerosene burner test' (FAR 25.853c, Part 2, Appendix F).

In a second preferred embodiment of the present invention the
5 polyurethane foam structure of the cushion is a Combustion Modified High Resilience (CMHR) foam. CMHR foams can be produced as either moulded foams or block foams. In common with the graphite/PU foams described above, the CMHR foams are high resilience PU-based foams. The main flame retardant in the CMHR foam is Melamine powder, although additional flame
10 retardant additives, such as chlorinated phosphate esters, are also usually present. CMHR foams are designed to meet the flammability requirements of Schedule 1, Part 1 of 'The Furniture and Furnishings (Fire) (Safety) Regulations 1988 (amended 1989) for use in domestic furniture in the United Kingdom. CMHR foams will also meet the requirements of the Federal Aviation
15 Authority's 'Vertical strip test' described above, but an aircraft seat cushion formed from a CMHR foam typically fails to satisfy the requirements of the 'Kerosene burner test'. To enable the CMHR foam cushions to satisfy 'Kerosene burner test' the foam needs to be covered and tested with a suitable fire-blocking layer, as discussed below.

20 As previously mentioned, the foams present in the foam structure, i.e. the low-density flame retardant foam and the flame retardant polyurethane

foam, must meet the requirements of the Federal Aviation Authority 'Vertical strip test'. If the foam passes this test, but an aircraft seat cushion prepared from the foam fails 'Kerosene burner test', then the foam structure of the cushion can be provided with an outer fire blocking layer which enables the composite aircraft seat to meet the prescribed requirements. The fire-blocking layer (FBL) may be a foam, fabric or foil material which is provided on the outer surface of the foam structure. Preferably, it is an interliner between the foam structure and the outer fabric cover. The FBL may be adhered to the surface of the foam structure, used as a loose cover or laminated or quilted to the inner surface of the fabric cover. Illustrative examples of suitable foam materials that can be used to form a FBL include post-treated PU foam, graphite/PU foam, neoprene foam and silicon foam. A fabric-based FBL can be prepared from either a woven, non-woven, felt or blend of any suitable fire-blocking fabric material. Illustrative examples of suitable fabric materials include the following: flame retardant cotton, para-aramids (e.g. Kevlar), meta-aramids (e.g. Nomex), Pre-Ox Pan, Basofil, and glass fibre.

According to a second aspect of the present invention there is provided an aircraft seat comprising a cushion as hereinbefore defined.

According to a third aspect of the present invention there is provided a method of manufacturing a cushion suitable for use in an aircraft seat as hereinbefore defined, said method comprising the steps of:

- (i) fabricating the low-density flame retardant foam into the desired configuration;
- (ii) coating the surface of said low-density flame retardant foam with a sealant barrier; and
- 5 (iii) applying the flame retardant polyurethane foam to the sealing barrier.

As previously mentioned, the sealant barrier may be applied as a film of material such as PVC or polyethylene. Preferably, however, the sealant barrier is applied as a "spray-on" coating of polyurethane or PVC, with polyurethane
10 being most preferred.

Once formed the cushion will usually be provided with an outer fabric cover prior to use.

If necessary, a suitable fire-blocking layer can be provided on the surface of the foam structure (preferably as an interliner between the foam
15 structure and the fabric cover).

How the invention may be put into practice will now be described, by way of example only, in reference to the following figures, in which:

Figure 1 is a diagrammatic illustration of a cross-sectional view taken through the foam structure of a first embodiment of an aircraft seat cushion
20 according to the invention; and

Figure 2 is a diagrammatic illustration of a cross-sectional view taken through the foam structure of a second embodiment of an aircraft seat cushion according to the invention.

In the following description of the figures like reference numerals are
5 used to denote like parts where appropriate.

Referring to Figure 1, the foam structure 101 comprises an inner core of Basotect™ Melamine foam 102 (BASF) surrounded by a layer of Metzoprotect™ graphite/PU foam (Kay-Metzeler Limited, U.K.). Disposed at the interface between the Melamine foam 102 and the graphite/PU foam 103 is
10 a sealing barrier 104 in the form of a spray-on coating of polyurethane sealant. In an alternative embodiment the invention, the sealing barrier 104 is a spray-on coating of polyvinylchloride.

The foam structure 101 is shaped and contoured to fit into the frame of a standard aircraft seat. Specifically, the lower surface 105 and the rear edge 106
15 are shaped to fit into a correspondingly shaped recess in the frame of the aircraft seat whilst the upper surface 107 is shaped to define the sitting or "seat" portion of the aircraft seat.

The foam structure 101 is provided with a fabric cover (not shown) prior to placement into the frame of an aircraft seat.

20 The foam structure differs from that of the conventional aircraft seat cushions in that a proportion of the graphite/PU foam is replaced by the

Melamine foam 102, which has a much lower density. As a consequence, the weight of the foam structure, and hence the final cushion, is substantially reduced.

5 The construction of the foam structure 101 shown in Figure 1 is preferred because the higher density graphite/PU foam provides the necessary rigidity and support to the lower density Melamine foam. In particular, the provision of an upper surface 107 formed of graphite/PU foam, as well as the lower surface 105, the rear edge 106, the front edge 108 and the side edges (not shown), is necessary in order to provide the sufficient support and comfort to a person sitting in the seat. Thus, the provision of a foam structure formed in this way enables a lightweight cushion to be produced without any detriment to the level of comfort and support provided.

In an alternative embodiment, the low-density Melamine foam also forms the lower surface 105 as well as the inner core of the foam structure. Hence, the inner core and the graphite/PU foam forms only the edges and the upper surface 107 of the foam structure. This construction also provides a cushion capable of providing sufficient support and comfort.

The foam structure 101 is manufactured by initially cutting and fabricating the low-density Melamine foam 102 into the desired shape. The Melamine foam 102 is then coated with the spray-on polyurethane sealant barrier 104. The coated Melamine foam (102,104) is then placed into the

mould for the final aircraft seat cushion and the liquid graphite/PU foam is applied around the coated Melamine foam. The liquid graphite/PU foam is then allowed to cream, rise, gel and cure to form the outer layer 103.

Both the low-density Basotect™ Melamine foam 102 and the
5 Metzoprotect™ graphite/PU foam 103 meet the prescribed requirements of the Federal Aviation Authority's 'Vertical strip test' and an aircraft seat cushion comprising the foam structure shown in Figure 1 also satisfies the requirements of the 'Kerosene burner test'.

A second embodiment of a foam structure according to the present
10 invention is illustrated diagrammatically in Figure 2. The embodiment shown in Figure 2 is similar to the embodiment illustrated in Figure 1 insofar as the foam structure 201 is correspondingly shaped and comprises of an inner core of low-density Basotect™ Melamine foam 102 provided with a spray-on polyurethane sealing barrier 104 on the outer surface thereof. However, instead
15 of the graphite/PU foam layer 103 present in the foam structure 101, the second embodiment of the foam structure 201 comprises a layer of CMHR foam 203. In common with the graphite/PU foam layer 103 described above in reference to Figure 1, the CMHR foam provides the necessary support and rigidity to the foam structure 201 and hence, the final cushion.

20 The CMHR foam satisfies the requirements of the Federal Aviation Authority's 'Vertical strip test', but an aircraft seat cushion formed in

accordance with the prescribed requirements fails the 'Kerosene burner test'. For this reason, a fire-blocking layer 210 is provided on the outer surface of the foam structure 201.

It shall be understood that the description of the two embodiments
5 shown in Figures 1 and 2 is for the purpose of illustration only and should not be construed as limiting the scope of the present invention in any way.

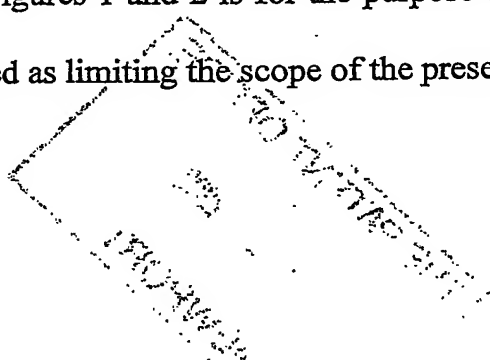


Figure 1


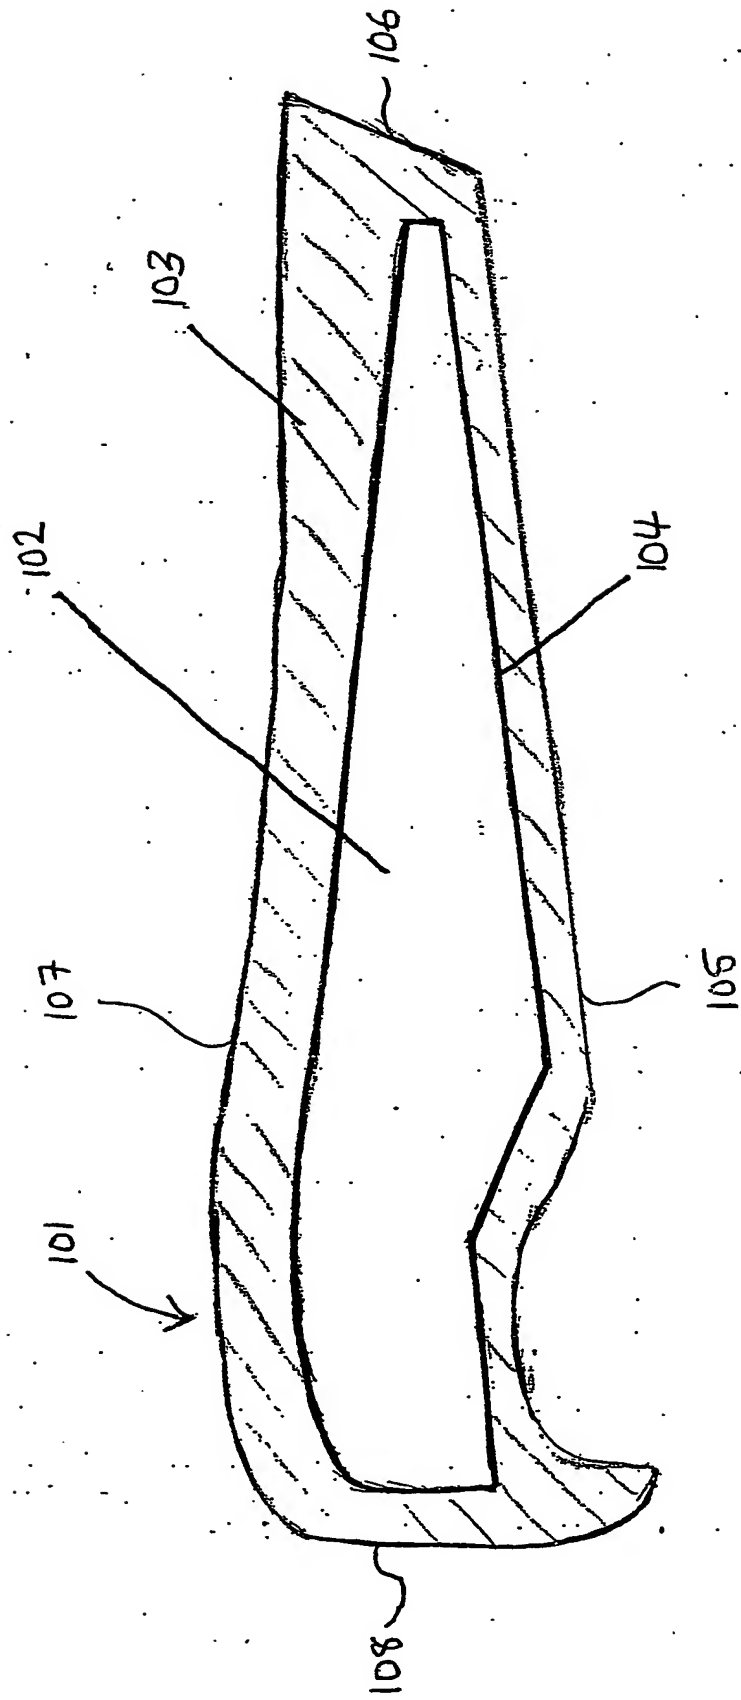


Figure 2

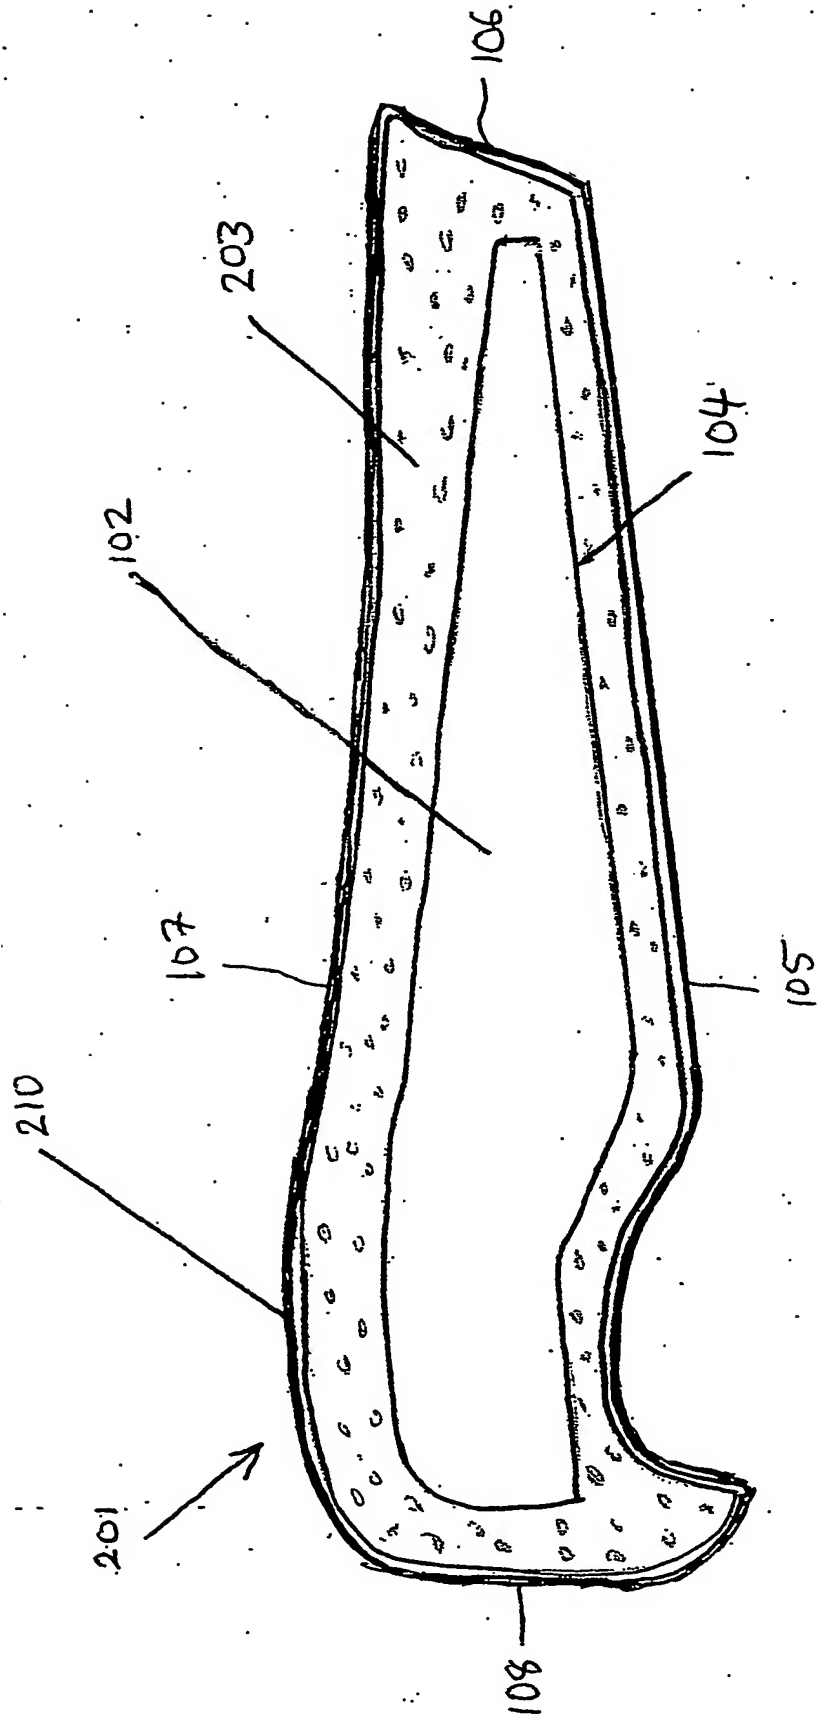

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.